


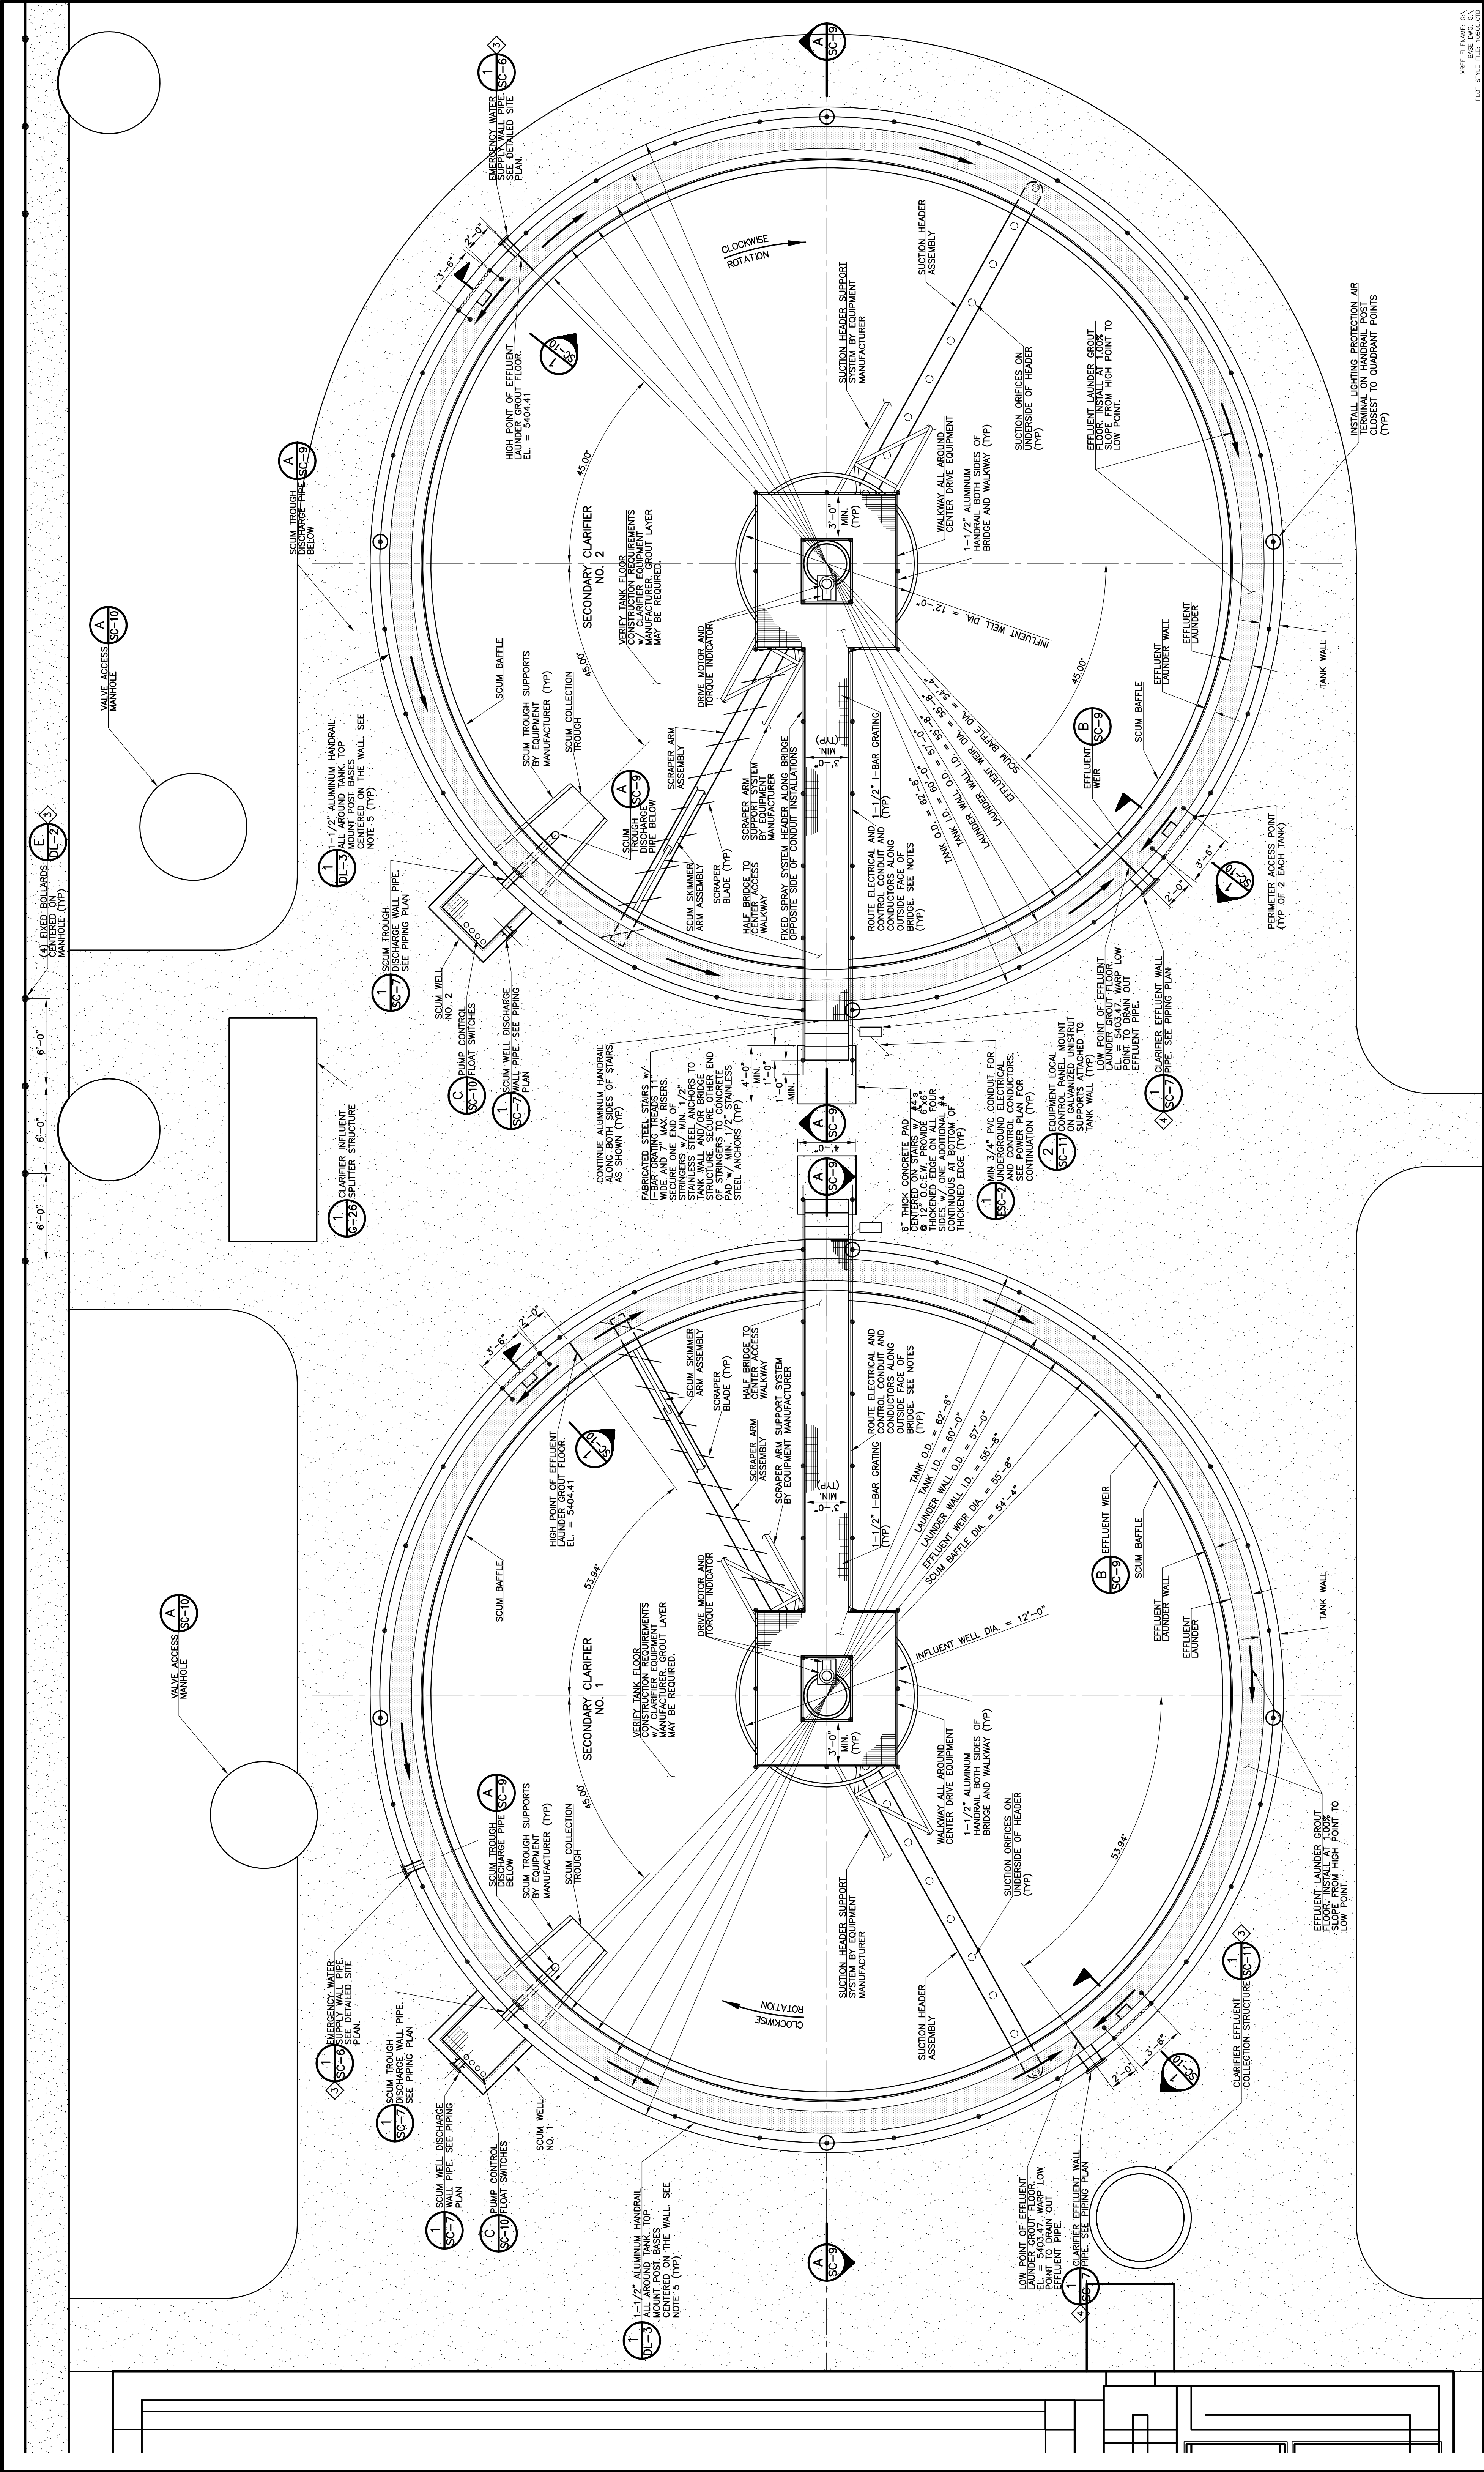

NOTES:

1.

POWER AND CONTROL CONDUITORS SHALL BE ROUTED ALONG OUTSIDE FACE OF BRIDGE IN MINIMUM 3/4" GALVANIZED RIGID CONDUIT WHERE EXPOSED. SECURE CONDUIT TO BRIDGE STRUCTURE OR HANDRAILS AS NECESSARY.

2.

PROVIDE FLEXIBLE CONDUIT TO ALL EQUIPMENT.

3.

PROVIDE SEPARATE CONDUITS FOR POWER AND SIGNAL WIRES SO AS TO NOT INTERFERE WITH SIGNAL WIRE COMMUNICATION.

4.

REFER TO THE ELECTRICAL DRAWINGS FOR DETAILED ELECTRICAL AND CONTROL WORK REQUIREMENTS.

5.

HANDRAIL POST SPACING SHALL BE 6'-0" MAXIMUM. HANDRAIL BETWEEN POSTS MAY BE STRAIGHT ALIGNMENTS. CURVED HANDRAIL IS ACCEPTABLE BUT NOT REQUIRED.

REVISIONS

NO.	DATE	DESCRIPTION
1	10/18/2010	PRELIMINARY ISSUE FOR CONTRACTOR COST QUOTATIONS
2	03/02/2011	ISSUED FOR BUILDING PERMIT SUBMITTAL TO PERMD (SECONDARY CLARIFIER COMPLEX)
3	06/10/2011	ISSUED FOR CONSTRUCTION (SECONDARY CLARIFIER COMPLEX)
4	07/07/2011	EST. NO. 009

THIS DRAWING IS THE PROPERTY OF GMS, INC., AND IS NOT TO BE REPRODUCED, MODIFIED OR USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF GMS, INC. BY AGREEMENT WITH THIS COMPANY.

DESIGNED

SC-10

CHECKED

SC-10

DATE

2010

PROJECT NO.

20106.362

GMS FILE NO.

2599

1 SECONDARY CLARIFIER EQUIPMENT PLAN

SCALE: 1" = 5'

PROCESS EQUIPMENT PLAN

HAROLD D. THOMPSON REGIONAL WATER RECLAMATION FACILITY

LOWER FOUNTAIN METROPOLITAN SEWAGE DISPOSAL DISTRICT

DRAWN

SC-10

DESIGNED

SC-10

CHECKED

SC-10

DATE

2010

PROJECT NO.

20106.362

GMS FILE NO.

2599

GMS, INC.

CONSULTING ENGINEERS

611 N. WEBER, SUITE 300

COLORADO SPRINGS, COLORADO 80903

SHEET

SC-8

OF

1

631FMSD02/02/06/03/SC2/SC8/SC8.dwg, SCA, 7/8/2011 4:34:15 PM, nhl, OutPDF, Wsh, 11